


BK301型快速接頭

BK301 TYPE QUICK COUPLER-SOCKET



▲ 功能：大型模具冷卻
FUNCTION: MOLD COOLING

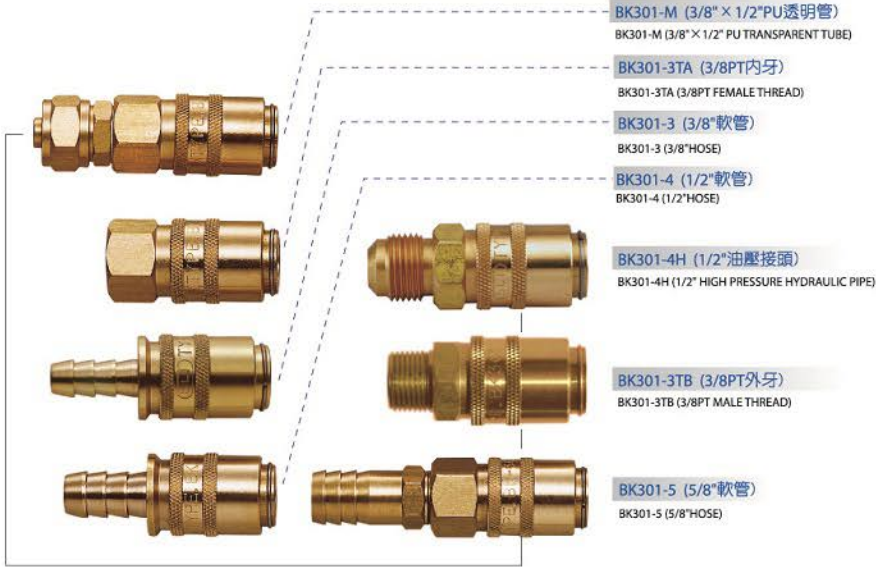

BK301-L4H (1/2"油壓接頭)
BK301-L4H
(1/2" HIGH PRESSURE HYDRAULIC PIPE)

BK301-L4 (1/2"塑膠軟管)
BK301-L4 (1/2" HOSE)


▲ 功能：大型模具冷卻
FUNCTION: MOLD COOLING



BK301-P1 插管式：1/2", 5/8" (軟管)
BK301-P1 (PLUG TYPE) : 1/2", 5/8" (HOSE)

BK301-P2 束管式：3/8" X 1/2" (PU透明管)
BK301-P2 BINDING TYPE : 3/8", 1/2" (PU TRANSPARENT TUBE)

▲ 功能：大型模具源頭供水
FUNCTION: MOLD SOURCE WATER SUPPLY

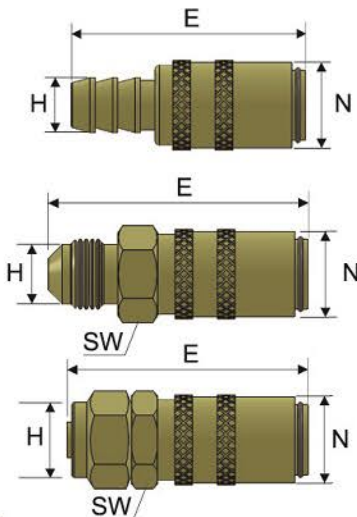

型號 ITEM NO.	E (長度) LENGTH (mm)	N (外徑) O.D. (mm)	SW	H (管接尺寸) TUBE SIZE	材質 MATERIAL
BK301-3	60.5	24	21H	3/8" 塑膠軟管 (Hose)	銅 BRASS
BK301-4	60.5			1/2" 塑膠軟管 (Hose)	
BK301-5	60.5			5/8" 塑膠軟管 (Hose)	
BK301-3TA	48			3/8"PT 內牙 (Female thread)	
BK301-3TB	52			3/8"PT 外牙 (Male thread)	
BK301-4TB	54			1/2"PT 外牙 (Male thread)	
BK301-M	57			3/8"x 1/2" PU 管 (PU tube)	
BK301-S2	57			φ 8 x φ 12 PU 管 (PU tube)	
BK301-L3	73			90° L 型 3/8" 塑膠軟管 (Hose)	
BK301-L4	73			90° L 型 1/2" 塑膠軟管 (Hose)	
BK301-L5	73			90° L 型 5/8" 塑膠軟管 (Hose)	
BK301-3H	55			3/8" (喇叭口) 白鐵紗管 9/16-18 37° flared	
BK301-4H	59			1/2" 喇叭口接頭 3/4-16 37° flared	
BK301-L3H	73			90° L 型 3/8" (喇叭) 9/16-18 37° flared	
BK301-L4H	73			90° L 型 1/2" (喇叭) 3/4-16 37° flared	
BK301-P1	75			外牙 + AX 插心	
BK301-P2	75	外牙 + AS 插心			
適用流體 Application	空氣、水、油 Gas、Water、Oil	工作壓力 Working Pressure Max. 10 kg/cm ²	工作溫度 Working Temp. 0~80°C 或 0~180°C		
單閉式 Single shut-off		直通式 Non-valved		Above item No. are single shut-off type, please add -OH after item No. if Non-valved type required. EX.: BK301-4-OH	