



▲ 功能：模具冷卻
FUNCTION : MOLD COOLING



▲ 功能：模具冷卻
FUNCTION : MOLD COOLING




▲ 功能：模具冷卻
FUNCTION : MOLD COOLING



▲ 功能：模具源頭供水
FUNCTION : MOLD SOURCE WATER SUPPLY



▲ 功能：耐高溫、油、蒸汽，保證耐溫180°C
安全耐用
FUNCTION : HIGH TEMPERATURE, OIL, STEAM RESISTANCE, GUARANTEE SAFETY AND DURABLE 180°C

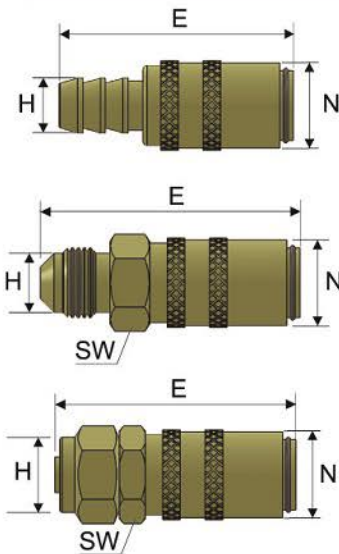

型號 ITEM NO.	E (長度) LENGTH (mm)	N (外徑) O.D. (mm)	SW	H(管接尺寸) TUBE SIZE	材質 MATERIAL
JK201-2	47	18	17H	5/16" 塑膠軟管 (Hose)	銅 BRASS
JK201-3	47			3/8" 塑膠軟管 (Hose)	
JK201-4	47			1/2" 塑膠軟管 (Hose)	
JK201-2TA	46			1/4"PT 內牙 (Female thread)	
JK201-2TB	50			1/4"PT 外牙 (Male thread)	
JK201-3TB	50			3/8"PT 外牙 (Male thread)	
JK201-S	48.5			φ 6.5 x φ 10 PU 管 (PU tube)	
JK201-S2	53.5			φ 8 x φ 12 PU 管 (PU tube)	
JK201-M	53.5			3/8"x 1/2" PU 管 (PU tube)	
JK201-L2	47			90° L 型 5/16" 塑膠軟管 (Hose)	
JK201-L3	47			90° L 型 3/8" 塑膠軟管 (Hose)	
JK201-L4	47			90° L 型 1/2" 塑膠軟管 (Hose)	
JK201-L3F	47			90° L 型 3/8" 耐溫膠管 (Hose)	
JK201-FL3H	47			90° L 型 3/8" (喇叭) 9/16-18 37° flared	
JK201-F2H	52			1/4" (喇叭) 白鐵紗管 7/16-20 37° flared	
JK201-F3H	53.5			3/8" (喇叭) 白鐵紗管 9/16-18 37° flared	
JK201-F4H	56	1/2" 喇叭口接頭 3/4-16 37° flared			
JK201-P1	70	外牙 + AX 插心			
JK201-P2	70	外牙 + AS 插心			
適用流體 Application	空氣、水、油 Gas、Water、Oil	工作壓力 Working Pressure Max. 10 kg/cm ²	工作溫度 Working Temp. 0~80°C 或 0~180°C		
單閉式 Single shut-off		直通式 Non-valved		Above item No. are single shut-off type, please add -OH after item No. if Non-valved type required. EX.: JK201-3-OH	